

Schulthess Rotary Ironer


MSI 30/160

MSI 30/160 is ideal for medium-sized laundries in hotels, restaurants, retirement and nursing homes, hospitals, state-owned enterprises, small industrial laundries and dry cleaners.

The wide contact surface and a roller of 1.6 metres enable laundry up to 3.2 metres wide to be ironed. High ironing pressure and a highly efficient steam extraction system ensure outstanding performance and excellent ironing results.

MSI 30/160 is your ideal companion: You can create up to 50 custom ironing programmes and save your preferred programme combination for consistent performance and ironing results.

The brand-new control is also the first platform on the market to offer integrated ironing tutorials and a hint for easy troubleshooting.

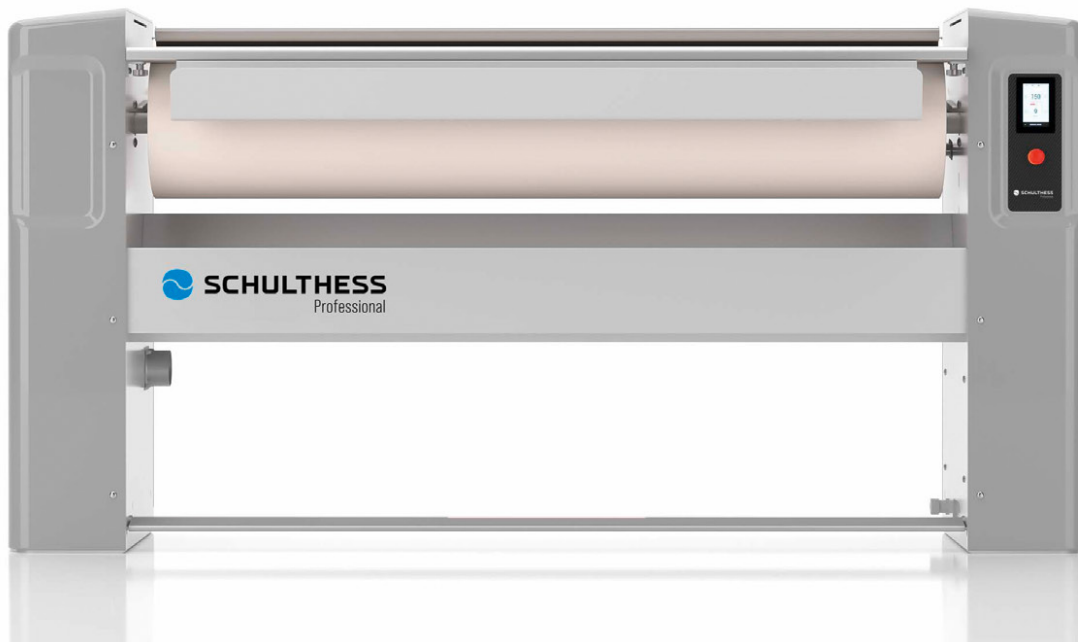

MSI 30/160

- Touchscreen display
- Dual temperature control
- User tutorials
- Troubleshooting hints
- 50 ironing programmes
(9 pre-set and 41 freely adjustable programmes)
- Manual mode
- Sleep mode
- Tenax roller winding
- Log file and USB connection


Technical data MSI 30/160

| | | |
|------------------------------------|------------------------|---------------|
| Company or brand name | Schulthess | |
| Type of appliance | Ironing machine | |
| Type of sales description | MSI 30/160 R | |
| Produkt-Nr. | 9652.1 | |
| Ironing machines | | |
| Output of dry linen ¹⁾ | kg/h | 50 |
| Roller diameter | mm | 300 |
| Roller length (working width) | mm | 1600 |
| Roller speed | m/min | 1-5 |
| Electrical installation | | |
| Connected rating, electric heating | kW | 11,4 |
| Motors | kW | 1,1 |
| Total connected rating | kW | 12,5 |
| Fuses | A | 21,5 |
| Ventilation installation | | |
| Exhaust air output | max. m ³ /h | 90 |
| Exhaust air connection | Ø mm | 75 |
| Dimensions | | |
| Machine width | mm | 2170 |
| Machine depth | mm | 592 |
| Machine height | mm | 1100 |
| Minimum transport opening | cm | 60 x 120 |
| Packing dimension | WxDxH mm | 2300x690x1300 |
| Machine weight | Net / Gross kg | 231 / 278 |


Explications:

1) Dry laundry output at approx. 25% residual moisture

FRONT

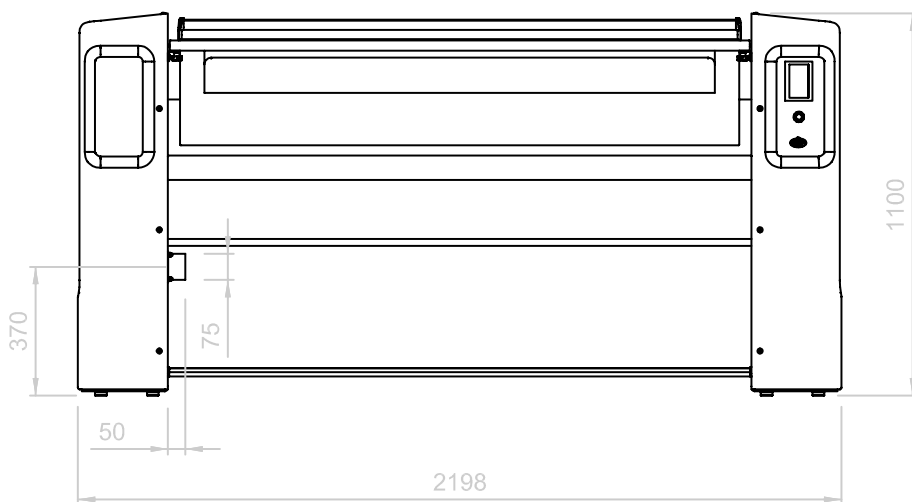

SIDE

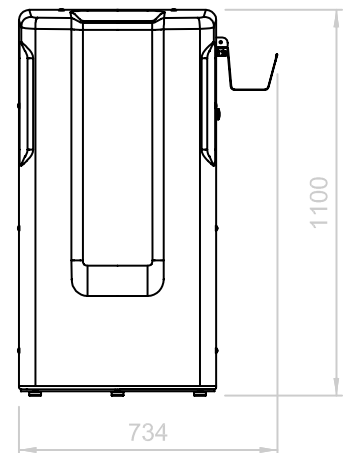

TOP

